
## LABC Registered Construction Details Masonry



## **Registration Number: E16MCPF4**

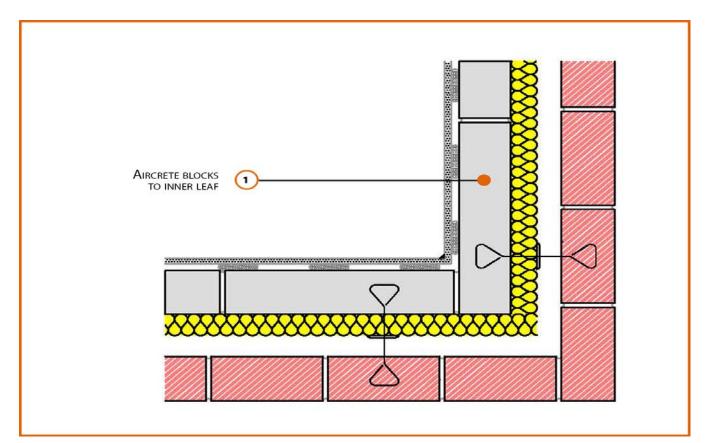

#### **Build Up**

External Masonry Cavity Wall

Masonry Outer Leaf ( $\lambda = 0.77$ )

100mm Aircrete Block Inner Leaf ( $\lambda$  = 0.11 W/mK)

Partial Fill Insulation

Normal Corner











# **Calculated ψ-values**

	Inner leaf blockwork
	Aircrete Block $\lambda$ = 0.11 W/mK
<b>Cavity Insulation</b>	ψ-value W/mK
<b>50mm</b> λ=0.022	0.046
100mm λ=0.022	0.037

# **Points to Watch**

- Ensure cavities are kept clean of mortar snots and other debris during construction.
- Seal all penetrations through air barrier with flexible sealant.

