
LABC Registered Construction Details Masonry



Registration Number: E16MCPF2

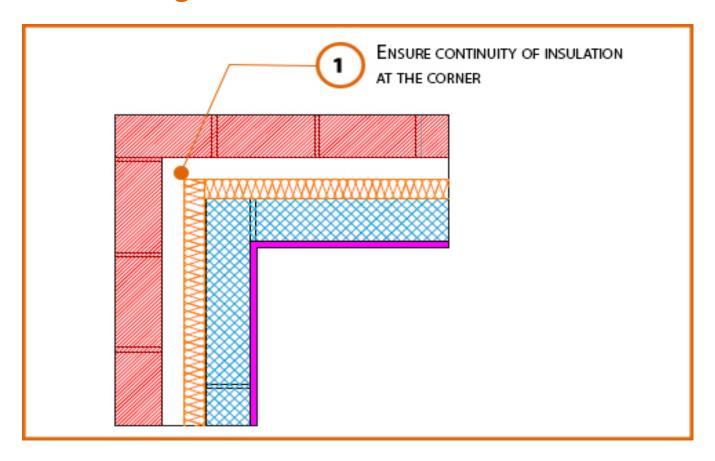

Build Up

External Masonry Cavity Wall

Masonry Outer Leaf ($\lambda = 0.77$)

Lightweight Concrete Block Inner Leaf $\lambda \le 0.60 \text{ W/mK}$

Partial Fill Insulation

Normal Corner









LABC Registered Construction Details Masonry



Calculated ψ-values

	Inner leaf blockwork
	Lightweight Concrete Block λ ≤ 0.60 W/mK
Cavity Insulation	ψ-value W/mK
50mm λ=0.022	0.064
100mm λ=0.022	0.046

Points to Watch

- Ensure cavities are kept clean of mortar snots and other debris during construction.
- Seal all penetrations through air barrier with flexible sealant.







