
# LABC Registered Construction Details Masonry



### **Registration Number: E7SMEW4**

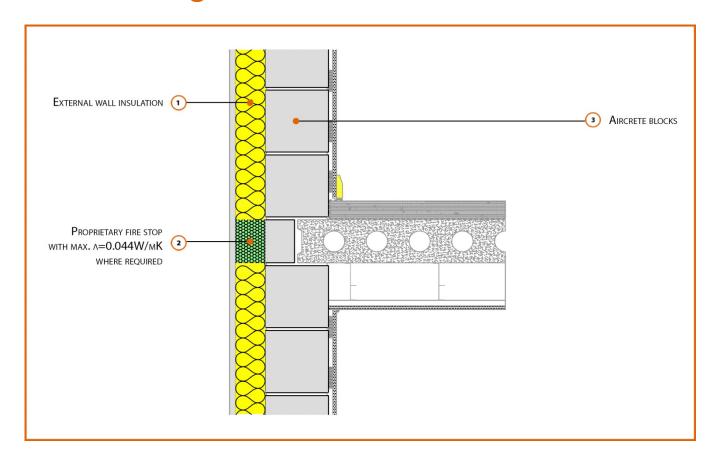

#### **Build Up**

Solid External Masonry Wall

215mm Aircrete Solid Wall ( $\lambda \le 0.15$  W/mK)

Render & Insulation ( $\lambda = 0.038 \text{ W/mK}$ )

Proprietary Insulated Firestop ( $\lambda \le 0.044$ W/mK)

Concrete Separating Floor Between Dwellings

150mm Precast Concrete Floor Plank









## LABC Registered Construction Details Masonry



### Calculated ψ-values

	Inner leaf blockwork
	Aircrete Block λ ≤ 0.15 W/mK
Cavity Insulation	ψ-value W/mK
<b>75mm</b> λ=0.038	0.047
100mm λ=0.038	0.038
<b>150mm</b> λ=0.038	0.028

#### **Points to Watch**

- Ensure block face is kept clean of mortar snots and other debris during construction to permit tight fit of external wall insulation.
- Seal between the wall air barrier and the floor above and below the connection with a flexible sealant.
- Separating floors require additional layers and components to comply with Fire and Noise requirements
- Seal all penetrations into block leaf with a flexible sealant or purpose made shoe, which should itself be sealed to the floor type when built into the wall rather than held on hangars.







