


Registration Number: E7SMEW1

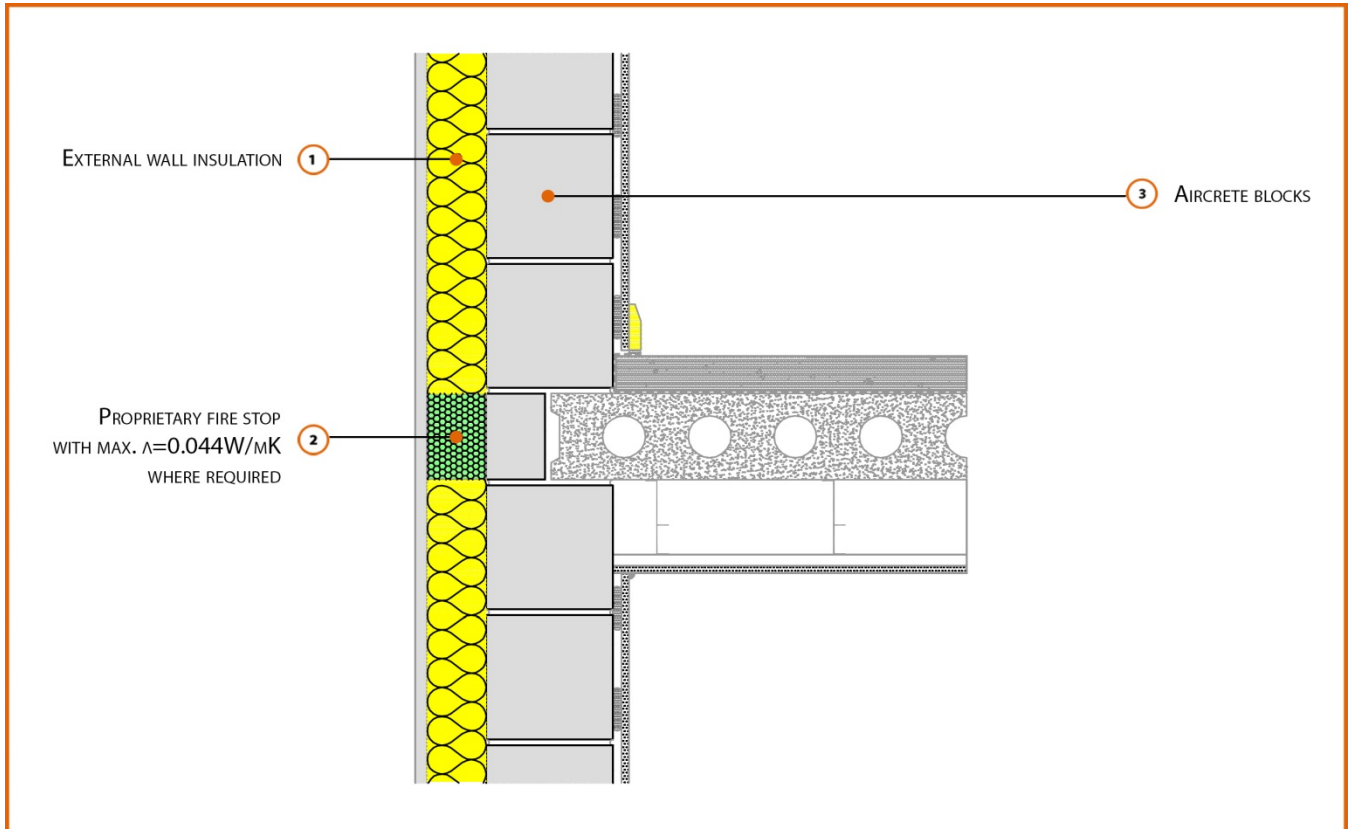

Build Up

Solid External Masonry Wall

215mm Aircrete Solid Wall ($\lambda \leq 0.11 \text{ W/mK}$)

Render & Insulation ($\lambda = 0.022 \text{ W/mK}$)

Proprietary Insulated Firestop ($\lambda \leq 0.044\text{W/mK}$)

Concrete Separating Floor Between Dwellings

150mm Precast Concrete Floor Plank

Calculated ψ -values

Cavity Insulation	Inner leaf blockwork
	Aircrete Block $\lambda \leq 0.11$ W/mK
	ψ -value W/mK
50mm $\lambda=0.022$	0.051
75mm $\lambda=0.022$	0.039
100mm $\lambda=0.022$	0.032

Points to Watch

- Ensure block face is kept clean of mortar snots and other debris during construction to permit tight fit of external wall insulation.
- Seal between the wall air barrier and the floor above and below the connection with a flexible sealant.
- Separating floors require additional layers and components to comply with Fire and Noise requirements
- Seal all penetrations into block leaf with a flexible sealant or purpose made shoe, which should itself be sealed to the floor type when built into the wall rather than held on hangars.